

DF 7500 dust control system

The Dust Fighter **DF 7500** is a dust control system with a maximum range of 40 metres, ideal for small and medium size working areas.

Notes



If you are powering the Dust-Fighter from a generating set we suggest you use a 20 kW – 380V generator, or larger

Standard Equipment

- Integrated control panel
- Phase inverter
- Booster pump with peripheral impeller
- Flowmeter for pump protection
- Pressure gauge for outlet pressure reading
- Stainless steel crown with nozzles
- Water drain system
- Equipped with 2 wheels, tow bar and forklift pockets
- 2 height adjustable stabilizers

Optional

- Electric tilting
- Available on homologated road trailer
- Automatic oscillation system
- Remote control to switch on/off the fan, the pump and the electrical rotation, complete with macro-sequential controls
- Dosing pump for chemical additives

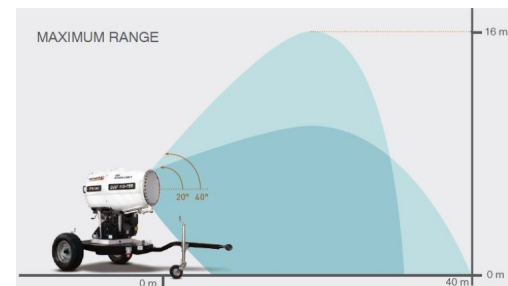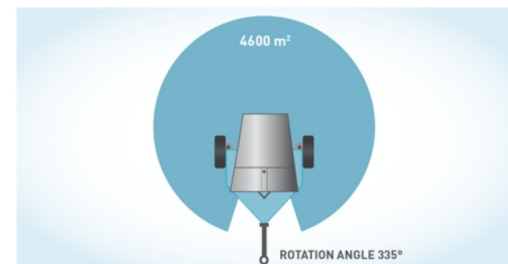

Picture shown may not reflect actual configuration.

DF 7500	Technical Data
Electrical engine power (fan)	7,5 kW
Coverage (*without wind)	30 – 40 m*
Electrical connection	Inlet Plug 3-phase – 32 A
Water connection	UNI 45 / STORZ / CAMLOCK
Minimum inlet pressure	1,0 bar
Water consumption	52 l/min
Water inlet filter	180 micron
Work angle	335°
Tilting	0 – 40°
Dimension with tow bar and wheels	3300 x 1830 x 2180 mm (L x W x H)
Dry weight	760 kg

AFTER-SALES SERVICE:

daniele.crepaldi@generac.com
fabio.busato@generac.com

SPARE PARTS:

manuela.mariani@generac.com

TUTORIALS:

www.towerlight.com/qr/